


180° DOWNTURN BEND, 2" HDPE W/2" PLUG
(SEE NOTE 6)

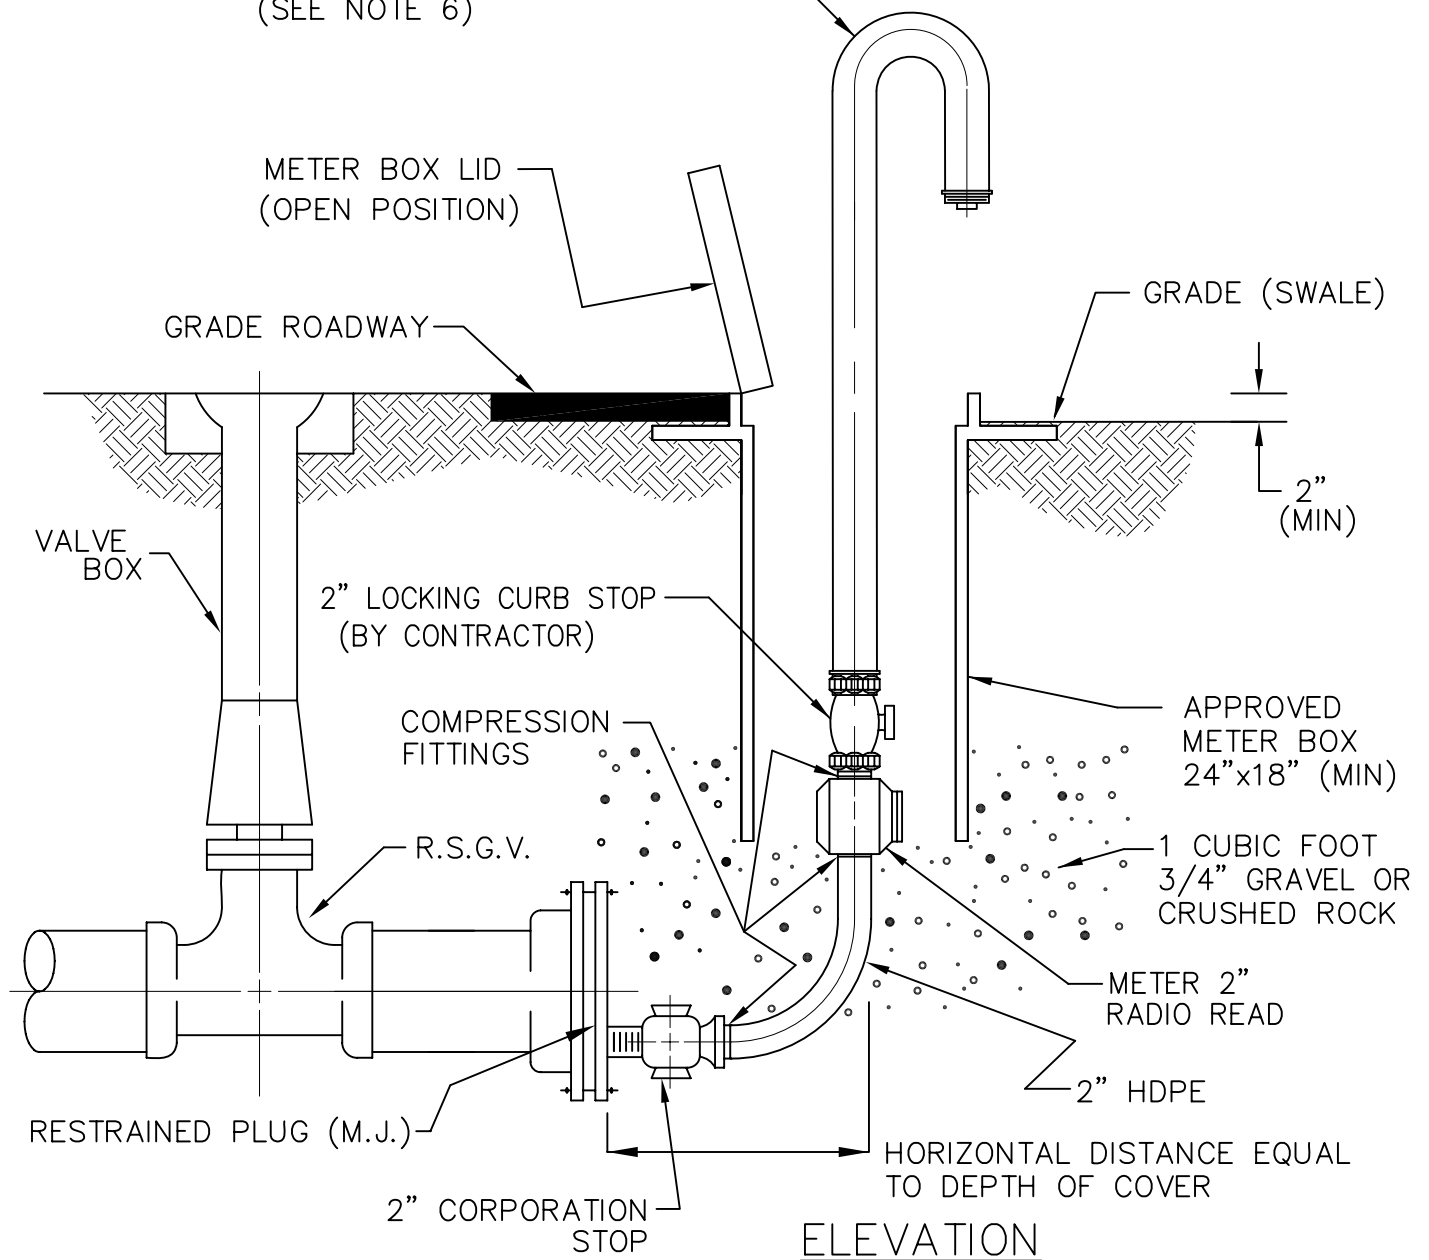

ELEVATION

NOTES

1. BLOW-OFF TO BE LOCATED AT ALL DEAD END LINES, AS REQUIRED BY IRCDUS ENGINEERING.
2. ALL MATERIALS ARE TO BE PER IRCDUS APPROVED MANUFACTURERS' PRODUCT LIST.
3. METHODS OF RESTRAINT AS APPROVED BY IRCDUS.
4. TRACE WIRE TO BE INSTALLED AS PER DETAIL M-14.
5. LOCATE MARKER BALLS ARE TO BE LOCATED ADJACENT TO ALL VALVE BOXES AND PLACED IN ALL METER BOXES WITHIN 24" FROM SURFACE.
6. THE DOWNTURN SECTION SHALL BE CONSTRUCTED BY IRCDUS WHEN A MAIN REQUIRES A BLOW OFF. THE DOWNTURN SECTION SHALL BE REMOVED AFTERWARD. ALL OTHER CONSTRUCTION TO BE BY THE CONTRACTOR.

INDIAN RIVER COUNTY
DEPARTMENT OF
UTILITIES SERVICES



MANUAL
2" BLOW-OFF

DRAWING
NO.

W-3

SEPTEMBER 2011